


NOVO

Nova generacija kancelarijskih svetiljki Varton™

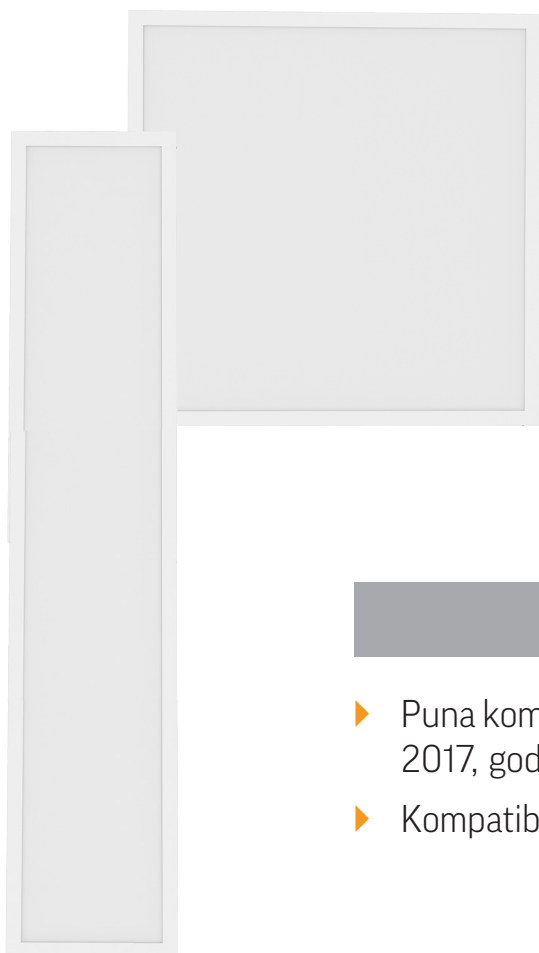

ŠTA JE IZMENJENO?

- ▶ Efektivnost do 150 lm/W*
- ▶ led čipovi Samsung
- ▶ novo napajanje od Helvar
- ▶ Niže cene
- ▶ Difuzor sa svetiljkom

STANDARDI







- ▶ Puna kompatibilnost sa zahtevima regulacije RF od 10 novembra 2017, god br. 1356
- ▶ Kompatibilnost sa zahtevima TP TC

ŠTA JE JOŠ INTERESANTNO?

















- ▶ 36 W = 30W
- ▶ 54 W = 45W
- ▶ Visoka efektivnost novog rešenja je smanjila potrošnju svetiljke za 20% uz zadržavanje svetlosnog luksa na nivou klasičnih kancelarijskih rešenja Varton™

* svetlosna efektivnost bez uzimanja u obzir propusnost difuzora

Dostupno za poručivanje:

Svetiljka	Naziv serije	Snaga	CCT, K	Difuzor	Modifikacije
 595×595×50 mm	A070 2.0 IP40	30/45 Bτ	 4000K	 prizma standard  opal	 DALI
 1195×180×50 mm	A270 2.0 IP40	30/45 Bτ			

Dostupne serije:

Svetiljka	Naziv serije	Snaga	CCT, K	Difuzor	Modifikacije
 595×595×50 mm	A070 2.0 IP40	30/45 Bτ	 3000K  4000K  5000K  6500K	 prizma standard  opal  mikro-prizma	 *  **
 1195×180×50 mm	A270 2.0 IP40	30/45 Bτ			
 595×180×50 mm	A170 2.0 IP40	16 Bτ			
 595×295×50 mm	A370 2.0 IP40	16/30 Bτ			
 1195×100×50 mm	A220 2.0 IP40	16/30 Bτ			
 1195×295×50 mm	A350 2.0 IP40	30/45 Bτ			
 1195×595×50 mm	A300 2.0 IP40	60 Bτ			




* - antipanic verzija

** - DALI verzija

- ▶ Svetiljke dolaze sa difuzorom, kopčom za montažu difuzora na 2 mesta, i preciznije sa 2 plastične kopče
- ▶ Stepen zaštite svih lampi je IP40



- ▶ Svetiljke su pripremljene u kućište lampe sa rupama 6mm za prekograničnu montažu. Ako je neophodna montaža na ravnu površinu uvod se može izbušiti šrafciđerom

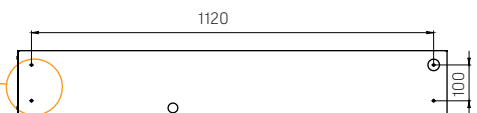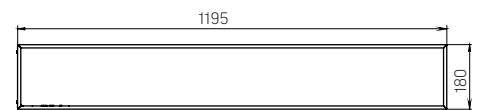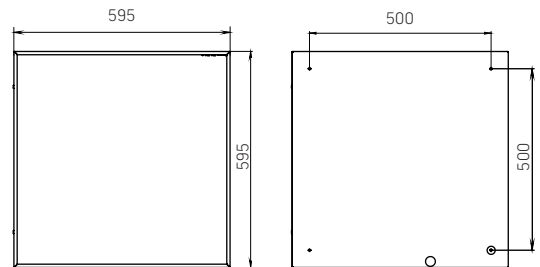

Tehničke karakteristike serije A070 2.0 IP40 i A270 2.0 IP40

Snaga	30/45 Bt
Svetlosni osvetljaj	prema tablici
Boja svetlosti	4000K
Stepen zaštite svetiljke	IP40
Veličina svetiljke	prema tablici
Indeks reprodukcije boje	AC176-264V
Indeks reprodukcije boje	Ra >84
Koeficijent efikasnosti	≥0,95
Klasa zaštite od električnog šoka	I
Faktor talasanja ≤ 2%	≤2%
Tip klimatske performanse	UHL 4
Temperaturni opseg	од +1° до +40°Ц
Garancija	3 godine
Rok trajanja svetiljke	50 000 časova
Dostupna je antipanik i DALI verzija	



Dostupno za poručivanje

A070 2.0 IP40

Artikal	Naziv	Svetlosni osvetljaj
V1-A0-00070-010P0-4003040	Svetiljka Varton kancelarijska A070 2.0 ugradno/nadgradna 595x595x50mm 30W 4000K IP40 sa opal difuzorom	3200 лм
V1-A0-00070-01PR0-4003040	Svetiljka Varton kancelarijska A070 2.0 ugradno/nadgradna 595x595x50mm 30W 4000K IP40 sa prizma difuzorom	3900 лм
V1-A0-00070-010P0-4004540	Svetiljka Varton kancelarijska A070 2.0 ugradno/nadgradna 595x595x50mm 45W 4000K IP40 sa opal difuzorom	4700 лм
V1-A0-00070-01PR0-4004540	Svetiljka Varton kancelarijska A070 2.0 ugradno/nadgradna 595x595x50mm 45W 4000K IP40 sa prizma difuzorom	5800 лм

A270 2.0 IP40

Artikal	Naziv	Svetlosni osvetljaj
V1-A0-00270-010P0-4003040	Svetiljka Varton kancelarijska A270 2,0 ugradno/nadgradna 1195x180x50mm 30W 4000K IP40 sa opal difuzorom	3100 lm
V1-A0-00270-01PR0-4003040	Svetiljka Varton kancelarijska A270 2,0 ugradno/nadgradna 1195x180x50mm 30W 4000K IP40 sa prizma difuzorom	3800 lm
V1-A0-00270-010P0-4004540	Svetiljka Varton kancelarijska A270 2,0 ugradno/nadgradna 1195x180x50mm 45W 4000K IP40 sa opal difuzorom	4800 lm
V1-A0-00270-01PR0-4004540	Svetiljka Varton kancelarijska A270 2.0 ugradno/nadgradna 595x595x50mm 45W 4000K IP40 sa prizma difuzorom	5700 lm